

Droppy® VN04

Pneumatic depositor (®patent)

CAPACITY (40mL-660mL)






- all stainless steel
- customizable and suitable for any fluid and liquid product
- all parts have been designed to simplify cleaning, maintenance and disassembly operations
- suitable for food, chemical, cosmetic and pharmaceutical products
- DROPPY VN04 works with compressed air, no electrical hazard
- maximum precision and constancy
- ANTI DRIP SUCKING
- different nozzles available



TIME SAVING



PNEUMATIC ONLY

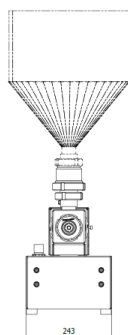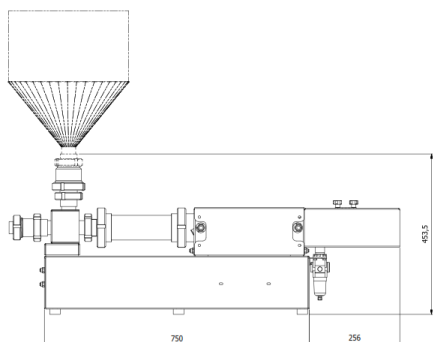



droppy VN (VN04)
standard basic

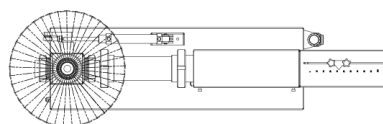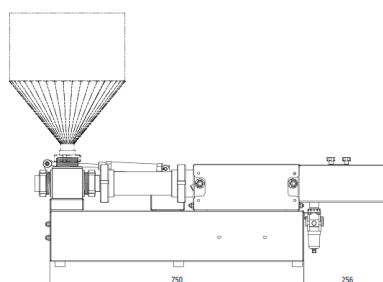

droppy VN (VN04)
with 3 way valve (optional)

DROPPY VN (VN04)		*CAPACITY		CODE NUMBER
		MAX	MIN	
A	STANDARD BASIC (DROPPY) NOT INCLUDED WITHOUT PIPE AND PLUNGER WITHOUT LOADING HOPPER WITHOUT ATTACHMENTS: EXIT FEMALE HOLE $\phi=40$ OPTIONS			VN04A001
B1	PIPE AND PLUNGER $\phi=65$ CAPACITY 650 ML (STANDARD)	660	75	VN04A021
B2	PIPE AND PLUNGER $\phi=40$ CAPACITY 250 ML	251	40	VN04A022
B3	PIPE AND PLUNGER $\phi=50$ CAPACITY 380 ML	392	60	VN04A023
C2	LOADING HOPPER CAPACITY 24 LT			VN04S023
D1	CHECK VALVES FOR FLUID AND LIQUID (STANDARD)			VN04A031
D2	**3 WAY INOX VALVE AND PNEU. CYLINDER/VALVE			VN04A032
PRICE DROPPY VN04=A+B_+C_+D_				
OPTIONALS GASKET AND PLUNGER $\phi65$ FOR HIGH TEMPERATURE SETTING (UP TO 150 °C)				VN04A051
NOTE *To maintain portion accuracy, it is recommended that the % volume setting for the machine be set between 10% to 80% of the scale. **SUITABLE FOR MEAT AND UNEVEN MIXTURE				

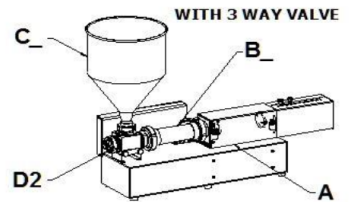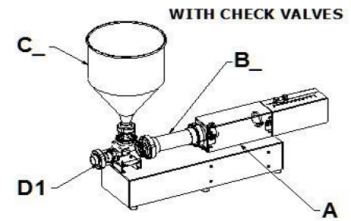

VN attachments (optionals)

- Rotary cut-off nozzle
- Split-up nozzle
- Donuts nozzle (®patent)
- Spreader nozzle
- Rotary spreader nozzle

VN FOODAERATION D.O.O.

Registered office : Kunaverjeva ulica 9 - 1000 Ljubljana (Slovenija)

Operational headquarters: Industrijska cesta 005 - 5000 Nova Gorica (Slovenija)

info@fodaeration.com

